

Data Sheet

CIE-H14A | 4 Ports Remote I/O Controller



Overview

CIE-H14A是由4个数字输入/输出端口构成的远程I/O控制器，用户可在远程通过因特网监视及控制连接在各端口的设备。


CIE-H14A按Modbus/TCP或是HTTP方式通信。Modbus/TCP方式的情况可使用我公司免费提供的ModMap软件或是应用支持Modbus/TCP的HMI程序。HTTP方式的情况使用浏览器，网页可按用户用途进行变更。而且还提供逻辑方式控制输出端口的MACRO功能。

同时支持串口 ↔ TCP/IP转换功能所以可以按有线串口联网服务器使用。



Features

- 4个数字输入端口
- 4个数字输出端口
- 支持Modbus/TCP
- 支持WEB(HTTP)
- 因特网开关应用
- 无偿提供监视/控制程序(ModMap)
- 广范围的电源输入
- 支持串口 ↔ TCP/IP转换功能

System Diagram

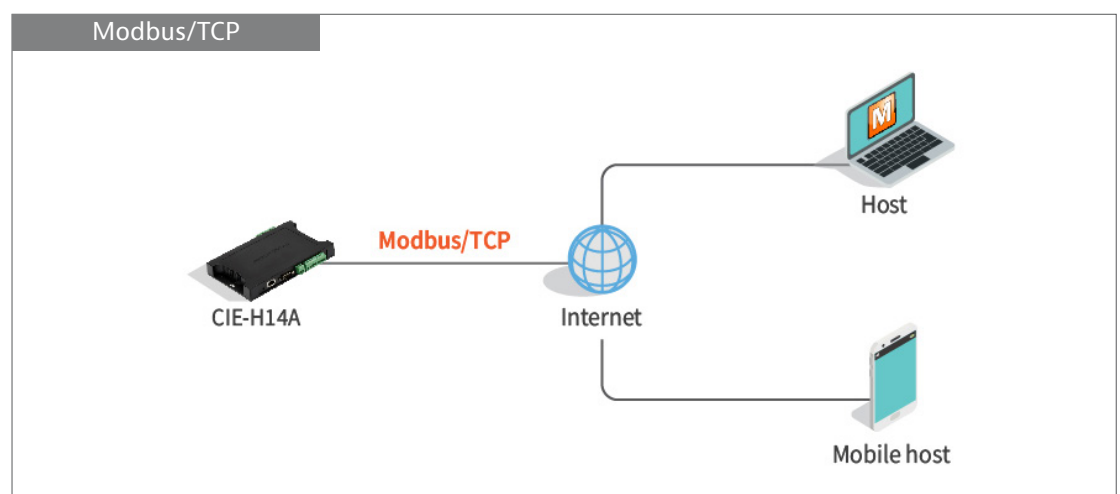

System Diagram

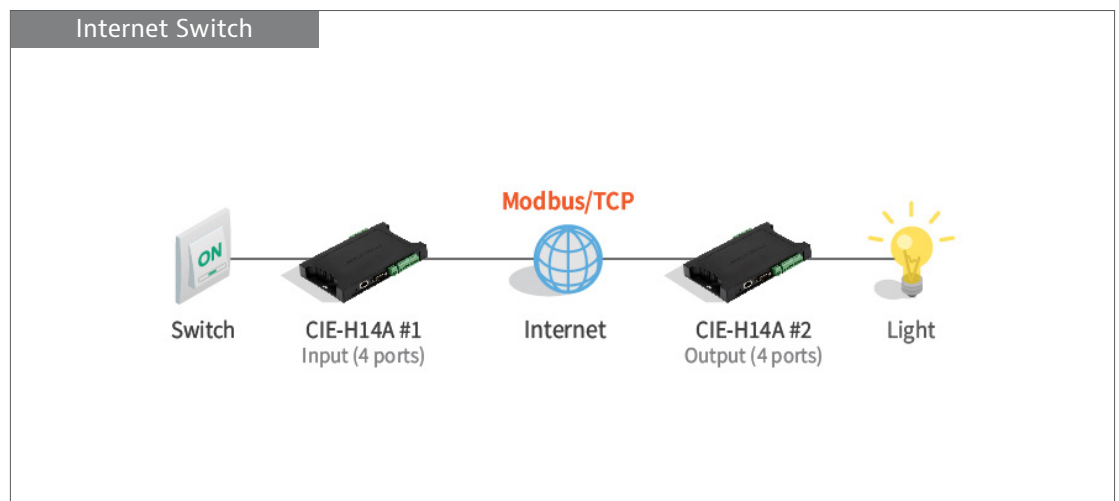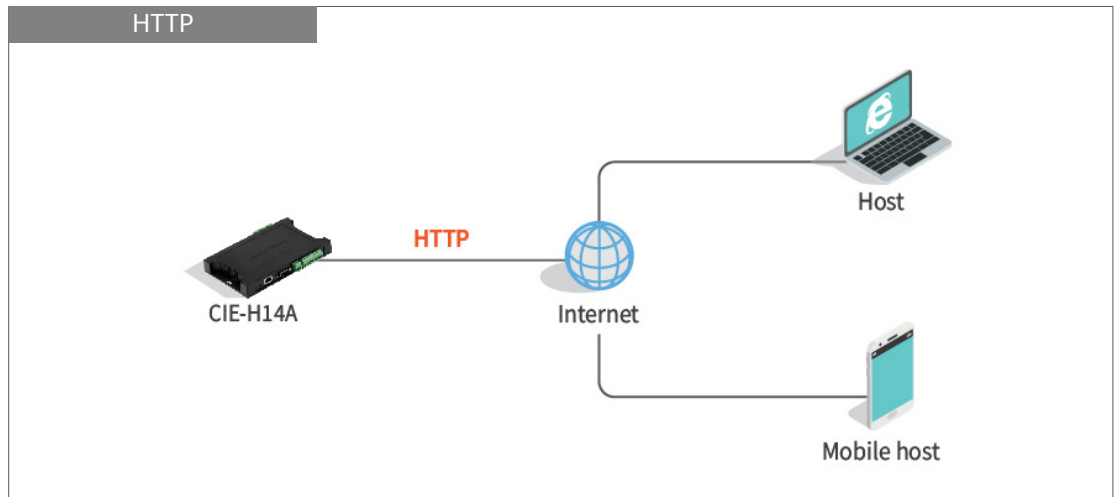

Specifications

Digital Input Port	
WET Input	4 ports
	Isolated by Photo-coupler
	ON - Over DC 2.2V, OFF - Under DC 1.2V
	Maximum input voltage - DC 24V
Digital Output Port	
Interface	4 ports
	Isolated by relay
	Type A (ON - short, OFF - open)
	Relay capacity - 5A (DC 28V, resistive load)
Serial Port	
Interface	1 x RS232 port
	RXD, TXD, RTS, CTS, DTR, DSR, GND
	±15KV ESD Protection
Connector	DSUB 9-pin Male
Baudrate	300 ~ 230,400 [bps]
Data Bits	5, 6, 7, 8
Parity	None, even, odd, mark, space
Stop Bit	1, 1.5, 2

Specifications

Ethernet Port	
Interface	10Base-T/100Base-TX Ethernet (RJ45)
	10M/100M Auto sense
	1:1 or Cross-over cable auto sense
	1000 VAC isolation
Software Functions	
Protocol	Modbus/TCP, HTTP, TCP, UDP, IP, ICMP, ARP, DHCP, PPPoE, TELNET, TFTP, DNS, DDNS, SMTP
Security	IP & MAC filtering
	Password for configuring
Controlling/Monitoring Method	Modbus/TCP, HTTP, Macro
Serial Port Communication Mode	TCP server, TCP client, UDP, AT command
Indicators	
System LED	PWR, STS, LINK, RXD, TXD
I/O Port LED	DI x 4, DO x 4
Serial Port LED	RXD, TXD
Supplementary Software	
ezManager	Configuration tool for Windows
ModMap	Management tool of I/O controllers for Windows
Dimension	
Size	174 x 123 x 28 [mm]
Weight	263g
Operating Environments	
Input Voltage	DC 8.5 ~ 38 [V]
Power Consumption	3W (typical condition)
Operating Temperature	-40 ~ +70 [°C]
Storage Temperature	-40 ~ +85 [°C]
Certificate	
Korea	KC - Registration (KN 32, KN 35)
Europe	CE - EMC 2014/30/EU, RoHS 2011/65/EU