

Data Sheet

# SIG-5451

 | 2-Port Digital Output I/O Gateway to Sollae Cloud

## Overview


SIG-5451是连接到Sollae Cloud的工业用I/O网关，配有2个数字输出端口。

用户使用Web浏览器可以通过远程地的PC,平板或者智能手机的APP对连接到产品的传感器/设备的数字信号进行控制。

## Features

- 2个数字输出端口(继电器): 输出NO及NC
- 网络接口
- 利用MQTT的Sollae Cloud免费连接
- 利用TLS1.2的数据通信安保
- 设备的客户端证书认证
- 工业用温度规格(-40°C ~ +85°C)

## System Diagram

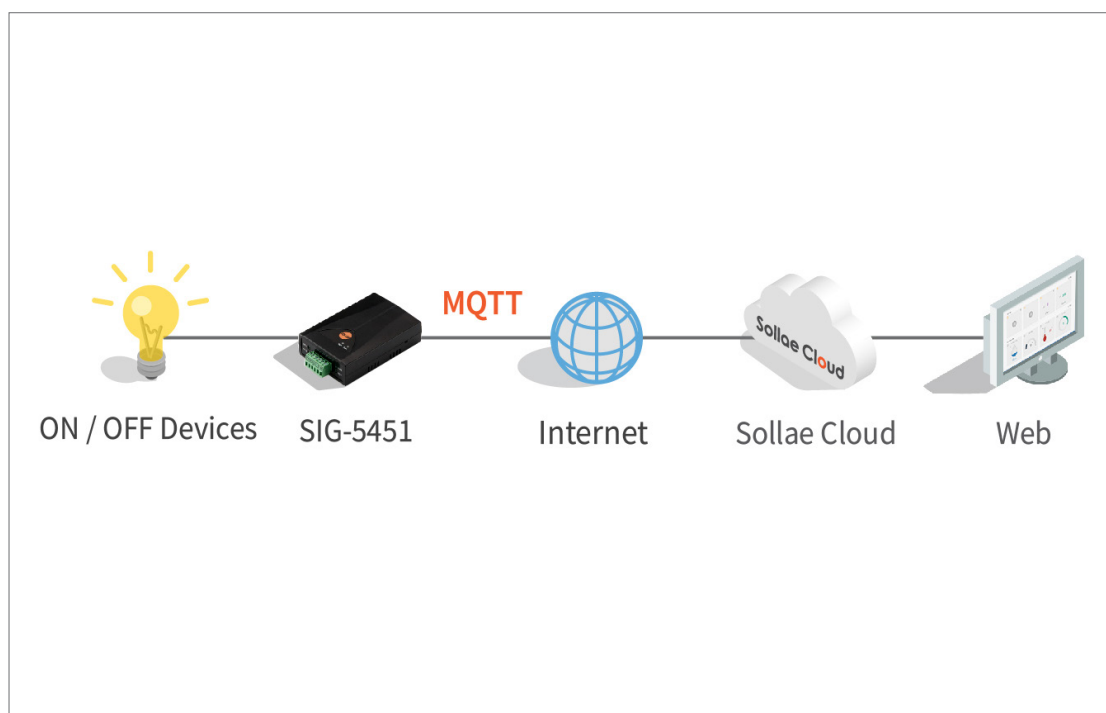

## Specifications

Digital Output	
Output Type	Relay (Type C - NO/NC, Max DC 30V/2A with resistive load)
Number of Ports	2 ports
Network Physical Interface	
Network Interface	10Base-T/100Base-TX Ethernet (RJ45)
	Ethernet Speed Auto Sense
	1:1 or Cross-over Cable Auto Sense
Software Functions	
Protocols	IP, TCP, ICMP, DHCP, mDNS, MQTT, SSL/TLS 1.2
Network Security	Client certificate-based mutual authentication over TLS 1.2
Indicators (LEDs)	
LED	PWR, STS, MTX, MRX, Do0, Do1
Management	
spFinder	Configuration and Monitoring Tool
Security	Password
Dimension	
Size	94mm x 57mm x 23mm
Weight	About 68g
Operating Environments	
Input Voltage	DC5V±0.5V
Protection	Reverse Voltage Protection / Surge Protection
Current Consumption	Typically, 210mA
Operating Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +85°C
Certificate	
KC	Registration (KN 32, KN 35)
CE	EMC 2014/30/EU, RoHS 2011/65/EU
FCC	FCC Part 15 Subpart B, Class A